




# HP Pavilion p6 Wireless Card Replacement

How to remove and replace a faulty wireless card on a HP Pavilion p6 desktop computer.

Written By: Oli

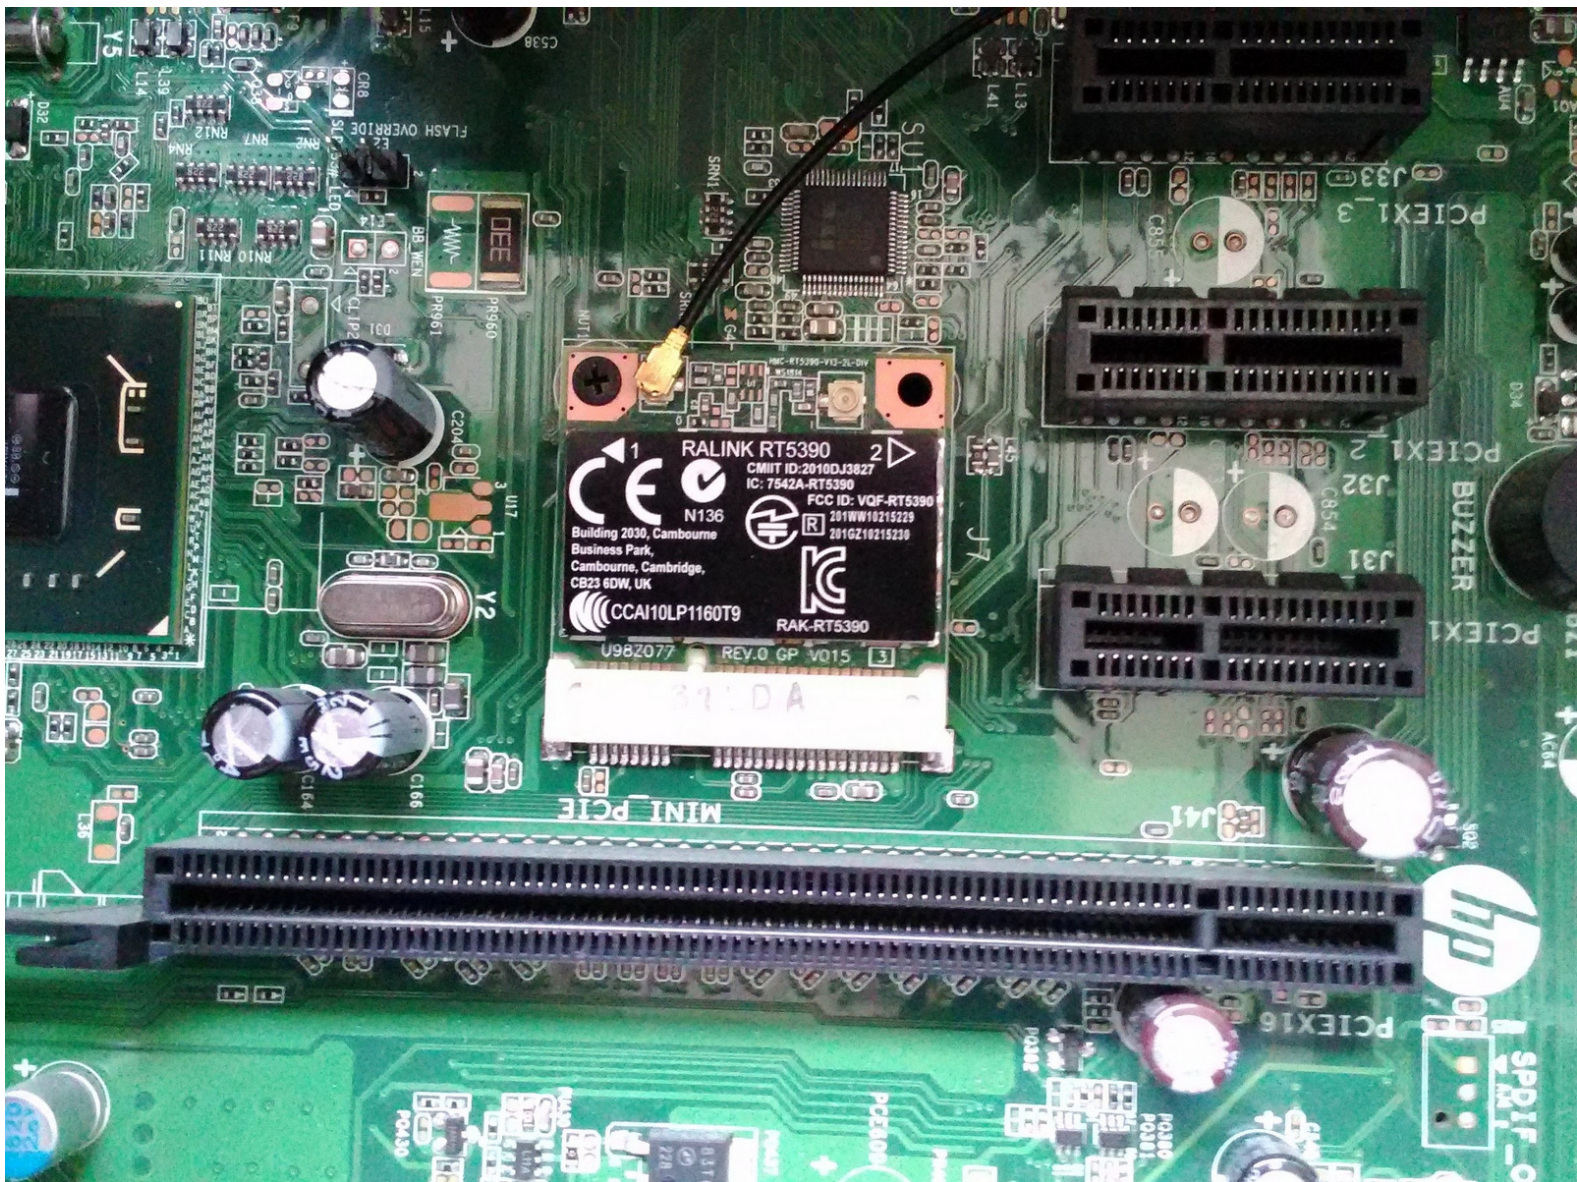





## INTRODUCTION

How to remove and replace a faulty wireless card on a HP Pavilion p6 desktop computer.






## Step 1 — Side Panel Removal



-  Before you start make sure that all of the leads have been disconnected from the computer.
-  It is strongly recommended to wait at least 15 minutes after turning it off to allow the computer and internal components to cool down.
-  It is recommended to lay the computer down with the pull tab at the top to allow it to be easily opened.
-  It is also worth mentioning at this point that for complete safety when working inside the computer that wearing an anti-static band and touching a grounded metal object before starting is good practice.


## Step 2



-  In order to remove the side panel a single screw needs to first be removed.
-  The side panel can then be pulled towards the back of the computer using the pull tab provided.
-  The panel then needs to be rotated as shown in order to remove it from the computer.




## Step 3 — Wireless Card

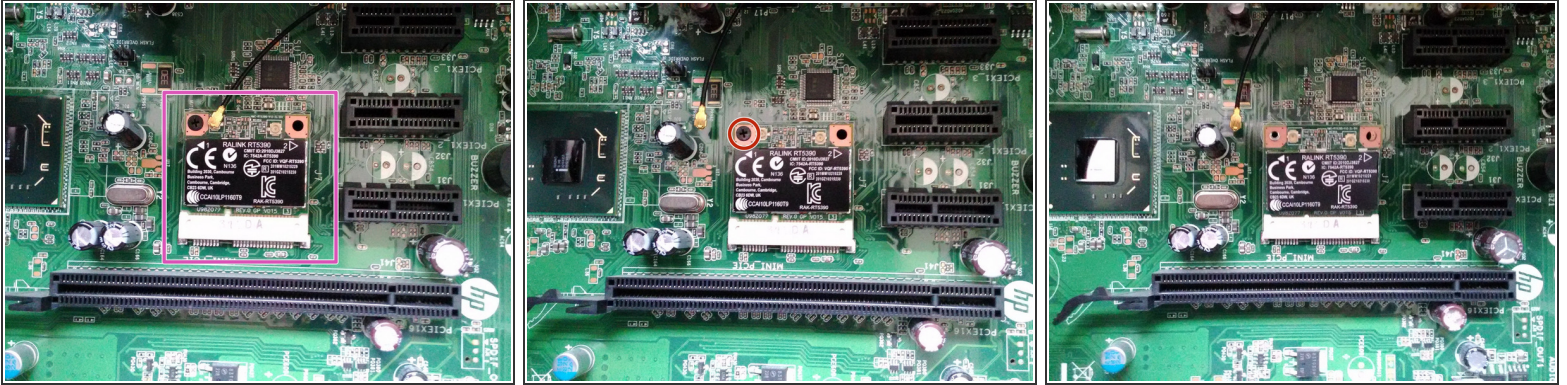

- First locate the wireless card, it should look like this.
- Next using a spudger or equivalent carefully pry the antenna cable off the wireless card, it should now look like the second picture.
- A single screw then needs to be removed in order to free the card.

## Step 4

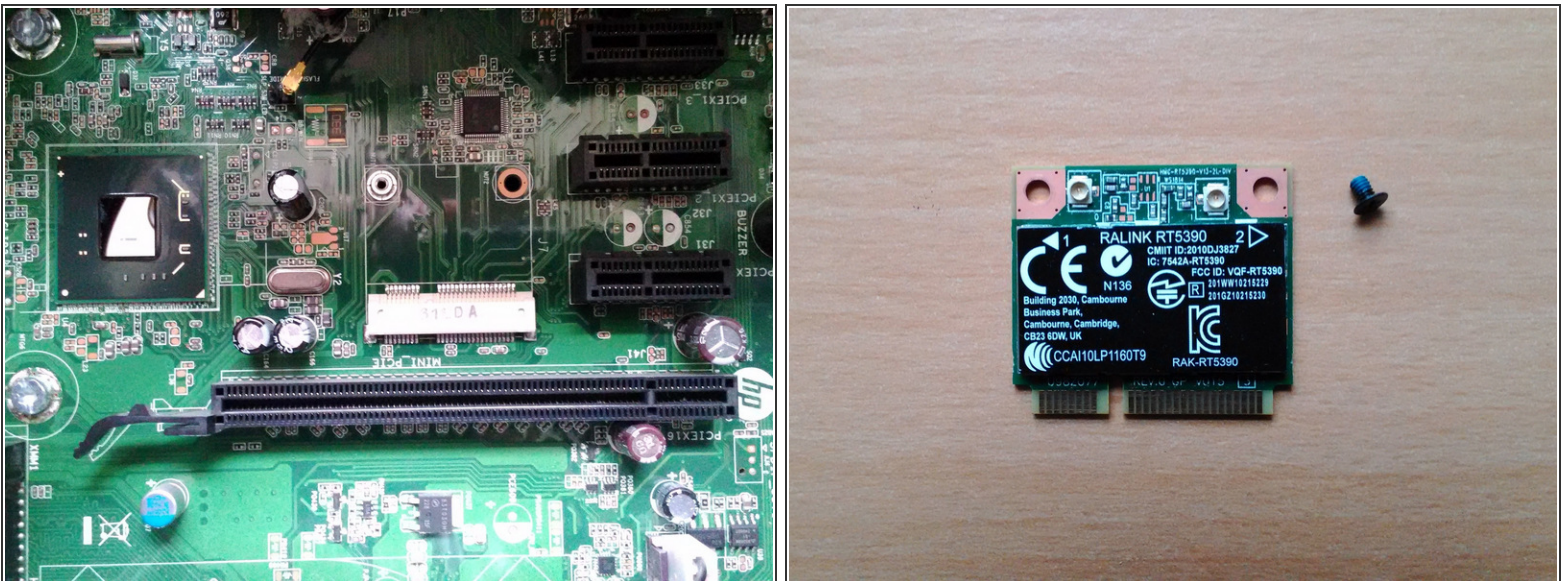

- The card can then just be easily removed by pulling it out and up.
- ☑ The wireless card should then be kept in a safe place and care taken not to lose the small screw that goes with it.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-20 05:50:26 PM.